


Scraper conveyor type PZ

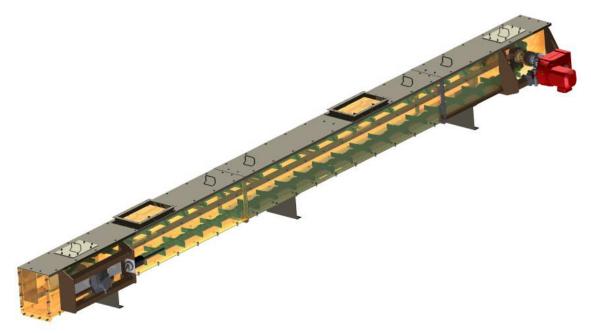

Advantages:

- transport of material to large distances
- ability to load and unload at any section of the route
- wide application in many branches of industry
- ability of performing dustproof transport
- works well during operation in harsh conditions

Equipment description:

Scraper (drag) conveyor belongs to the group of tension memberless conveyors, it is designed for transport of loose material (ash, coal dust, gypsum, sawdust, biomass etc.) Material is transported via a trough bottom with the use of scrapers with a shape adapted to the cross-section of the trough, mounted transversely to the chain(s). Scraper conveyors are comprised of a trough, conveyor, chain with flights, drive mechanism, tensioning mechanism, inlet opening and outlet opening.

Technical data:

Standard scraper width [mm]	315, 400, 500, 630, 800, 1000
Amount of tie rods	1, 2 or 3

For the best selection of the equipment please contact our technical office, tel.: +48 77/470 04 97.

Tel./Fax: +48 77 / 474 50 05 Tel./Fax: +48 77 / 474 25 92 www.OFAMA.eu e-mail: ofama@ofama.eu